

3G SMARTVFD

VARIABLE FREQUENCY DRIVES

The 3G SmartVFD is the 3rd generation of SmartVFD variable frequency drives designed specifically for use in HVAC applications. Designed to control any HVAC pump or fan application to maximize system reliability and energy efficiency. SmartVFD will efficiently operate 3-phase induction, permanent magnet, and high-efficiency synchronous reluctance motors.

The 3G SmartVFD is easy to install, communicates effectively with building control systems to minimize energy consumption.



FEATURES AND BENEFITS

EASY COMMUNICATION

- Start-up Wizards - SmartStart and Automatic Motor Adaptation make commissioning easy for all motor types, enter nominal information and let the drive measure motor characteristics to optimize performance.
- Graphic Interface - Using the graphical keypad makes navigating parameters easy. INFO key provides easy access to help information in the onboard manual. BACK and OK buttons simplify programming.
- Embedded Communications - Standard BACnet, Modbus, FLN and N2 allow monitoring and control of serial communications, reducing installation cost.
- Dedicated for HVAC - The 3G SmartVFD includes intelligent functions for pumps fans and compressors.
- Built-in logic - Smart logic controller and four auto-tuning PID controllers can control HVAC functions reducing the need for control tasks in the building management system.

BUILT-IN PROTECTION

- DC-link reactor ensures low harmonic disturbance of the power supply
- Fire override mode for continued operation for essential services
- Enclosure classes NEMA 1 or NEMA 12
- Overvoltage trip and undervoltage trip protection
- Ground fault protection
- Mains and motor phase supervisions
- Overcurrent and unit overtemperature protection
- Motor overload, motor stall and motor underload protection
- Short-circuit protection of +24V and +10V reference voltage

SMART TECHNOLOGY

- 6-pulse IGBT, PWM technology
- Back-channel cooling directly exhausts up to 90% of heat losses
- Real-Time Clock
- >98% Displacement Power Factor Rating
- 98% Efficiency at full load
- 0-590Hz output frequency capabilities

COMPLIANCE

- 100KA SCCR (Short-Circuit Current Rating) compliant
- EN 61000-3-12 compliant
- EN 61800-3 Category C1, C2 and C3
- RoHS compliant

PRODUCT SPECIFICATION

POWER CHARACTERISTICS

LINE POWER SUPPLY (L1, L2, L3)

Supply Voltage	Nominal 208/230 V AC: 200 to 240 V AC \pm 10% Nominal 460 V AC: 380 to 280 V AC \pm 10% Nominal 600 V AC: 525 to 600 V AC \pm 10% (Frame A, B, C), 525 to 690 V AC \pm 10% (Frame D)
Supply Frequency	50/60 Hz \pm 5%
True Power Factor (λ)	\geq 0.9 nominal at rated load
Displacement power factor (cos ϕ)	Near unity ($>$ 0.98)
Switching on input supply L1, L2, L3	Frame A, B, C: up to 10 HP maximum 2 times/min, greater than 10 HP maximum 1 time/min Frame D: maximum 1 time/2 min
Environment according to EN60664-1	Overvoltage category III/pollution degree 2

MOTOR OUTPUT (U, V, W)

Output voltage	0-100% of supply voltage
Output frequency	0-590 Hz
Switching on output	Unlimited
Ramp times	1-3600 s

AMBIENT ENVIRONMENT

OPERATING ENVIRONMENT

Ambient temperature	Max 122°F [50°C] (24-hour average maximum 113°F [45°C])
Minimum ambient temperature during full-scale operation	32°F [0°C]
Minimum ambient temperature at reduced performance	14°F [-10°C]
Temperature during storage/transport	-13°+149/158°F [-25°+65/70°C]
Max. relative Humidity	5%-93% (IEC 721-3-3; Class 3K3 (noncondensing) during operation)
Maximum altitude above sea level without derating	3,300 ft [1000 m]
Vibration Test	1.0 g
Enclosure Ratings NEMA1/IP21 (All Frame Sizes)	NEMA12/IP55 (Frame A, B, C) NEMA12/IP54 (Frame D)
Aggressive environment (IEC 60068-2-43) H2S test	class Kd
EMC Standards, Emission	EN 61800-3
EMC standards, Immunity	EN 61800-3

I/O CHARACTERISTICS

DIGITAL INPUTS

Programmable digital inputs	4 fixed DI, 2 configurable DIO (6) total
Terminal number	18, 19, 27, 29, 32, 33
Logic	PNP or NPN
Voltage level	0-24 V DC
Voltage level, logic '0' PNP	$<$ 5 V DC
Voltage level, logic '1' PNP	$>$ 10 V DC
Voltage level, logic '0' NPN	$>$ 19 V DC
Voltage level, logic '1' NPN	$<$ 14 V DC
Maximum voltage on input	28 V DC
Input resistance, Ri	Approx. 4 k Ω

ANALOG INPUTS

Number of analog inputs	2
Terminal number	53, 54
Modes	Voltage or current
Mode select	Frame A, B, C: Switch S201 and switch S202 Frame D: Switch A53 and A54
Voltage mode	Switch = OFF (U)
Voltage level	-10 to +10 V (scalable)
Input resistance, Ri	Approximately 10 k Ω
Max. voltage	± 20 V
Current mode	Switch = ON (i)
Current level	0/4 to 20 mA (scalable)
Input resistance, Ri	Approximately 200 Ω
Max. current	30 mA
Resolution for analog inputs	10 bit (+ sign)
Accuracy of analog inputs	Max. error 0.5% of full scale
Bandwidth	100 Hz

PULSE INPUTS

Programmable pulse	2
Terminal number pulse	29, 33
Max. Frequency at terminal 29, 33	110 kHz (pushpull driven)
Max. Frequency at terminal 29, 33	5 kHz (open collector)
Max. Frequency at terminal 29, 33	4 Hz
Voltage level	See digital inputs
Maximum voltage on input	28 V DC
Input resistance, Ri	Approx. 4 k Ω
Pulse input accuracy (0.1-1 kHz)	Max. error: 0.1% of full scale

ANALOG OUTPUTS

Number of programmable analog outputs	1
Terminal number	42
Current range at analog output	0/4-20 mA
Max. load GND - analog output	500 Ω
Accuracy on analog output	Frame A, B, C: Max. error: 0.5% of full scale Frame D: Max. error: 0.8% of full scale
Resolution on analog output	8 bit

DIGITAL OUTPUT

Programmable digital/pulse outputs	2 configurable DIO
Terminal number	27, 29
Voltage level at digital/frequency output	0-24 V
Max. output current (sink or source)	40 mA
Max. load at frequency output	1 k Ω
Max. capacitive load at frequency output	10 nF
Minimum output frequency at frequency output	0 Hz
Maximum output frequency at frequency output	32 kHz
Accuracy of frequency output	Max. error: 0.1% of full scale
Resolution of frequency outputs	12 bit

RELAY OUTPUTS	
Programmable relay outputs	2
Environment according to EN 60664-1	Overvoltage category III/pollution degree 2
Relay O1 (Frame A, B, C)	
Terminal number	1-2 (NO), 1-3 (NC)
Maximum terminal load, 1-2 (NO) and 1-3 (NC)	240 V AC, 2A, Resistive 240 V AC, 0.2A, Inductive @ $\cos\phi$ 0.4 60 V DC, 1 A, Resistive 24 V DC, 0.1A, Inductive
Minimum terminal load, 1-2 (NO) and 1-3 (NC)	24 V DC, 10 mA 24 V AC, 2 mA
Relay O1 (Frame D)	
Terminal number	1-2 (NO), 1-3 (NC)
Maximum terminal load, 1-2 (NO)	400 V AC, 2A, Resistive 240 V AC, 0.2A, Inductive @ $\cos\phi$ 0.4 80 V DC, 1 A, Resistive 24 V DC, 0.1A, Inductive
Maximum terminal load, 1-3 (NC)	240 V AC, 2A, Resistive 240 V AC, 0.2A, Inductive @ $\cos\phi$ 0.4 60 V DC, 1 A, Resistive 24 V DC, 0.1A, Inductive
Minimum terminal load, 1-2 (NO) and 1-3 (NC)	24 V DC, 10 mA 24 V AC, 2 mA
Relay O2 (All Frame Sizes)	
Terminal number	4-5 (NO), 4-6 (NC)
Maximum terminal load, 4-5 (NO)	400 V AC, 2A, Resistive 240 V AC, 0.2A, Inductive @ $\cos\phi$ 0.4 80 V DC, 1 A, Resistive 24 V DC, 0.1A, Inductive
Maximum terminal load, 4-6 (NC)	240 V AC, 2A, Resistive 240 V AC, 0.2A, Inductive @ $\cos\phi$ 0.4 60 V DC, 1 A, Resistive 24 V DC, 0.1A, Inductive
Minimum terminal load, 4-5 (NO) and 4-6 (NC)	24 V DC, 10 mA 24 V AC, 2 mA


CONTROL CARD	
RS-485 serial communication	
Terminal number 68	(P, TX+, RX+), 69 (N, TX-, RX-)
Terminal number 61	Common for terminals 68 and 69
24 V DC output	
Terminal number	12, 13
Output voltage	24 V \pm 1, -3 V
Max. load	200 mA
10 V DC output	
Terminal number	50
Output voltage	10.5 V \pm 0.5 V
Max. load	15 mA
USB serial communication	
USB standard	1.1 (full speed)
USB plug	USB type B device plug

CONTROL CHARACTERISTICS	
Resolution of output frequency at 0-590 Hz	\pm 0.003 Hz
Repeat accuracy of Precise start/stop (terminals 18, 19)	\leq \pm 0.1 ms
System response time (terminals 18, 19, 27, 29, 32, 33)	\leq 2 ms
Speed control range (open-loop)	1:100 of synchronous speed
Speed accuracy (open-loop)	30-4000 rpm: error \pm 8 rpm

TERMINAL ASSIGNMENTS

TERMINAL	LABEL	DESCRIPTION
24 V DC	12	24 V DC supply voltage for digital inputs and external 13 transducers. Maximum output current 200 mA for all 24 V loads.
	13	
DI	18	Digital Inputs.
DI	19	
DIO	27	For digital input or output. Default setting is input.
DIO	29	
DI	32	Digital Inputs.
DI	33	
DI COM	20	Common for digital inputs and 0 V potential for 24 V DC supply.
AO COM	39	Common for analog output.
AO	42	Programmable analog output. 0-20 mA or 4-20 mA at a maximum of 500 Ω
10 V DC	50	10 V DC analog supply voltage for potentiometer or thermistor. 15 mA maximum.
AI	53	Analog Input. For voltage or current. Switches A53 and A54 select mA or V.
AI	54	
AI COM	55	Common for analog input.
	61	Integrated RC filter for cable shield. ONLY for connecting the shield in the event of EMC problems.
RS-485 (+)	68	RS-485 Interface. A control card switch is provided for termination resistance.
RS-485 (-)	69	
RO1 (C)	01	Form C relay output. For AC or DC voltage and resistive or inductive loads.
RO1 (NO)	02	
RO1 (NC)	03	
RO2 (C)	04	
RO2 (NO)	05	
RO2 (NC)	06	

PRODUCT NOMENCLATURE

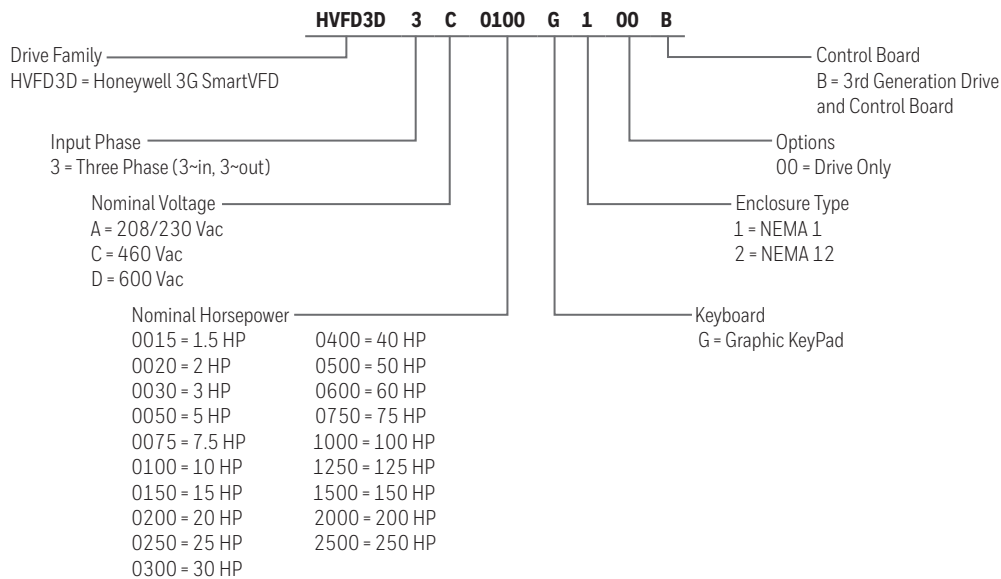

WEIGHT AND DIMENSIONS

208/230 V AC MODELS WEIGHTS AND DIMENSIONS

HP	CURRENT (A)	MODEL	ENCLOSURE	FRAME	OVERALL DIMENSIONS			
					WIDTH (IN.)	HEIGHT (IN.)	DEPTH (IN.)	WEIGHT (LB)
1.5	6.6	HVFD3D3A0015G100B	NEMA 1	A2	3.5	14.7	8.1	11.7
2	7.5	HVFD3D3A0020G100B						
3	10.6	HVFD3D3A0030G100B						
5	16.7	HVFD3D3A0050G100B		A3	5.3	14.7	8.1	15.5
7.5	24.2	HVFD3D3A0075G100B						
10	30.8	HVFD3D3A0100G100B		B1	9.6	19.5	10.3	51.0
15	46.2	HVFD3D3A0150G100B						
20	59.4	HVFD3D3A0200G100B		B2	9.6	26.1	10.3	59.6
25	74.8	HVFD3D3A0250G100B						
30	88	HVFD3D3A0300G100B		C1	12.2	27.3	12.2	99.2
40	115	HVFD3D3A0400G100B						
50	143	HVFD3D3A0500G100B		C2	14.6	30.7	13.2	143.3
60	170	HVFD3D3A0600G100B						
75	190	HVFD3D3A0750G100B		D1	12.8	35.2	14.9	137.0
100	240	HVFD3D3A1000G100B		D2	16.5	41.3	14.9	276.0
125	302	HVFD3D3A1250G100B						
1.5	6.6	HVFD3D3A0015G200B		NEMA 12	A5	9.5	16.5	7.9
2	7.5	HVFD3D3A0020G200B						
3	10.6	HVFD3D3A0030G200B						
5	16.7	HVFD3D3A0050G200B						
7.5	24.2	HVFD3D3A0075G200B	B1		9.6	19.0	10.3	51.0
10	30.8	HVFD3D3A0100G200B						
15	46.2	HVFD3D3A0150G200B	B2		9.6	25.7	10.3	59.6
20	59.4	HVFD3D3A0200G200B						
25	74.8	HVFD3D3A0250G200B	C1		12.2	27.0	12.2	99.2
30	88	HVFD3D3A0300G200B						
40	115	HVFD3D3A0400G200B	C2		14.6	30.2	13.2	143.3
50	143	HVFD3D3A0500G200B						
60	170	HVFD3D3A0600G200B	D1		12.8	35.2	14.9	137.0
75	190	HVFD3D3A0750G200B	D2		16.5	41.3	14.9	276.0
100	240	HVFD3D3A1000G200B						
125	302	HVFD3D3A1250G200B						

460 V AC MODELS WEIGHTS AND DIMENSIONS

HP	CURRENT (A)	MODEL	ENCLOSURE	FRAME	OVERALL DIMENSIONS								
					WIDTH (IN.)	HEIGHT (IN.)	DEPTH (IN.)	WEIGHT (LB)					
1.5	2.7	HVFD3D3C0015G100B	NEMA 1	A2	3.5	14.7	8.1	11.7					
2	3.4	HVFD3D3C0020G100B											
3	4.8	HVFD3D3C0030G100B											
5	8.2	HVFD3D3C0050G100B		A3	5.3	14.7	8.1	15.5					
7.5	11	HVFD3D3C0075G100B											
10	14.5	HVFD3D3C0100G100B											
15	21	HVFD3D3C0150G100B		B1	9.6	19.5	10.3	51.0					
20	27	HVFD3D3C0200G100B											
25	34	HVFD3D3C0250G100B											
30	40	HVFD3D3C0300G100B		B2	9.6	26.1	10.3	59.6					
40	52	HVFD3D3C0400G100B											
50	65	HVFD3D3C0500G100B											
60	80	HVFD3D3C0600G100B		C1	12.2	27.3	12.2	99.2					
75	105	HVFD3D3C0750G100B											
100	130	HVFD3D3C1000G100B											
125	160	HVFD3D3C1250G100B		C2	14.6	30.7	13.2	143.3					
150	190	HVFD3D3C1500G100B											
200	240	HVFD3D3C2000G100B											
250	302	HVFD3D3C2500G100B	D1	12.8	35.2	14.9	137.0						
1.5	2.7	HVFD3D3C0015G200B						NEMA 12	A5	9.5	16.5	7.9	29.8
2	3.4	HVFD3D3C0020G200B											
3	4.8	HVFD3D3C0030G200B											
5	8.2	HVFD3D3C0050G200B	B1	9.5	19.0	10.3	51.0						
7.5	11	HVFD3D3C0075G200B											
10	14.5	HVFD3D3C0100G200B											
15	21	HVFD3D3C0150G200B	B2	9.5	25.7	10.3	59.6						
20	27	HVFD3D3C0200G200B											
25	34	HVFD3D3C0250G200B											
30	40	HVFD3D3C0300G200B	C1	12.1	27.0	12.2	99.2						
40	52	HVFD3D3C0400G200B											
50	65	HVFD3D3C0500G200B											
60	80	HVFD3D3C0600G200B	C2	14.6	30.2	13.2	143.3						
75	105	HVFD3D3C0750G200B											
100	130	HVFD3D3C1000G200B											
125	160	HVFD3D3C1250G200B	D1	12.8	35.2	14.9	137.0						
150	190	HVFD3D3C1500G200B											
200	240	HVFD3D3C2000G200B											
250	302	HVFD3D3C2500G200B											

600 V AC MODELS WEIGHTS AND DIMENSIONS

HP	CURRENT (A)	MODEL	ENCLOSURE	FRAME	OVERALL DIMENSIONS			WEIGHT (LB)
					WIDTH (IN.)	HEIGHT (IN.)	DEPTH (IN.)	
3	3.9	HVFD3D3D0030G100B	NEMA 1	A3	5.3	14.7	8.1	15.5
5	6.1	HVFD3D3D0050G100B						
7.5	9	HVFD3D3D0075G100B						
10	11	HVFD3D3D0100G100B						
15	18	HVFD3D3D0150G100B		B1	9.6	19.5	10.3	51.0
20	22	HVFD3D3D0200G100B						
25	27	HVFD3D3D0250G100B						
30	34	HVFD3D3D0300G100B						
40	41	HVFD3D3D0400G100B		B2	9.6	26.1	10.3	59.6
50	52	HVFD3D3D0500G100B						
60	62	HVFD3D3D0600G100B						
75	83	HVFD3D3D0750G100B						
100	100	HVFD3D3D1000G100B		C1	12.2	27.3	12.2	99.2
125	131	HVFD3D3D1250G100B						
150	155	HVFD3D3D1500G100B						
200	192	HVFD3D3D2000G100B						
			C2	14.6	30.7	13.2	143.3	
			D1	12.8	35.2	14.9	137.0	
3	3.9	HVFD3D3D0030G200B	NEMA 12	A5	9.5	16.5	7.9	29.8
5	6.1	HVFD3D3D0050G200B						
7.5	9	HVFD3D3D0075G200B						
10	11	HVFD3D3D0100G200B						
15	18	HVFD3D3D0150G200B		B1	9.5	19	10.3	51.0
20	22	HVFD3D3D0200G200B						
25	27	HVFD3D3D0250G200B						
30	34	HVFD3D3D0300G200B						
40	41	HVFD3D3D0400G200B		B2	9.5	25.7	10.3	59.6
50	52	HVFD3D3D0500G200B						
60	62	HVFD3D3D0600G200B						
75	83	HVFD3D3D0750G200B						
100	100	HVFD3D3D1000G200B		C1	12.1	27	12.2	99.2
125	131	HVFD3D3D1250G200B						
150	155	HVFD3D3D1500G200B						
200	192	HVFD3D3D2000G200B						
			C2	14.6	30.2	13.2	143.3	
			D1	12.8	35.2	14.9	137.0	

APPLICABLE TECHNICAL LITERATURE

TABLE	REFERENCE
Installation and User Guide	31-00559

Honeywell Building Technologies

Honeywell
715 Peachtree Street NE
Atlanta, GA 30308
buildings.honeywell.com

31-00558-01 | Rev | 08/22
© 2022 Honeywell International Inc.

